


Table 3 Piston Rod End Styles (Series H, LH and A) See page 105 for Series MN

ROD MM	A	B	$-.001$ $-.003$	C	CC	*D	KK ₁	KK _{2 3 5}	NA	AD	AE	$+.001$ $-.002$	AF diameter	AC
5/8	3/4	1 1/8		3/8	5/8-18	1/2	1/2-20	7/16-20	19/32	5/8	1/4		3/8	1 1/8
1	1 1/8	1 1/2		1/2	1-14	7/8	7/8-14	3/4-16	31/32	15/16	3/8		1 1/16	1 1/2 (#1)
1 3/8	1 5/8	2		5/8	1 3/8-12	1 1/8	1 1/4-12	1-14	1 11/32	1 1/16	3/8		7/8	1 3/4
1 3/4	2	2 3/8		3/4	1 3/4-12	1 1/2	1 1/2-12	1 1/4-12	1 45/64	1 5/16	1/2		1 1/8	2
2	2 1/4	2 5/8		7/8	2-12	1 11/16	1 3/4-12	1 1/2-12	1 61/64	1 11/16	5/8		1 3/8	2 5/8
2 1/2	3	3 1/8		1	2 1/2-12	2 1/16	2 1/4-12	1 7/8-12	2 29/64	1 15/16	3/4		1 3/4	3 1/4
3	3 1/2	3 3/4		1	3-12	2 5/8	2 3/4-12	2 1/4-12	2 15/16	2 7/16	7/8		2 1/4	3 5/8 (#2)
3 1/2	3 1/2	4 1/4		1	3 1/2-12	3	3 1/4-12	2 1/2-12	3 7/16	2 11/16	1		2 1/2	4 3/8
4	4	4 3/4		1	4-12	3 3/8	3 3/4-12	3-12	3 15/16	2 11/16	1		3	4 1/2
4 1/2	4 1/2	5 1/4		1	4 1/2-12	**	4 1/4-12	3 1/4-12	4 27/64	3 3/16	1 1/2		3 1/2	5 1/4
5	5	5 3/4		1	5-12	**	4 3/4-12	3 1/2-12	4 59/64	3 3/16	1 1/2		3 7/8	5 3/8
5 1/2	5 1/2	6 1/4		1	5 1/2-12	**	5 1/4-12	4-12	5 27/64	3 15/16	1 7/8		4 3/8	6 1/4
7	7	8		1	7-12	**	6 1/2-12	5 1/2-12	6 57/64	4 1/16	2		5 3/4	6 1/2

* Distance across wrench flats.
 ** (4) Spanner holes 33/64" x 1/2" deep.
 Note: Other rod sizes available. Consult factory.

▲ Rod end style KK₂ is studded as standard for 5/8" and 1" diameter rods.
 Studded rod end style is available for all rod sizes.
 ■ See page 105 for Series MN piston rod end styles.

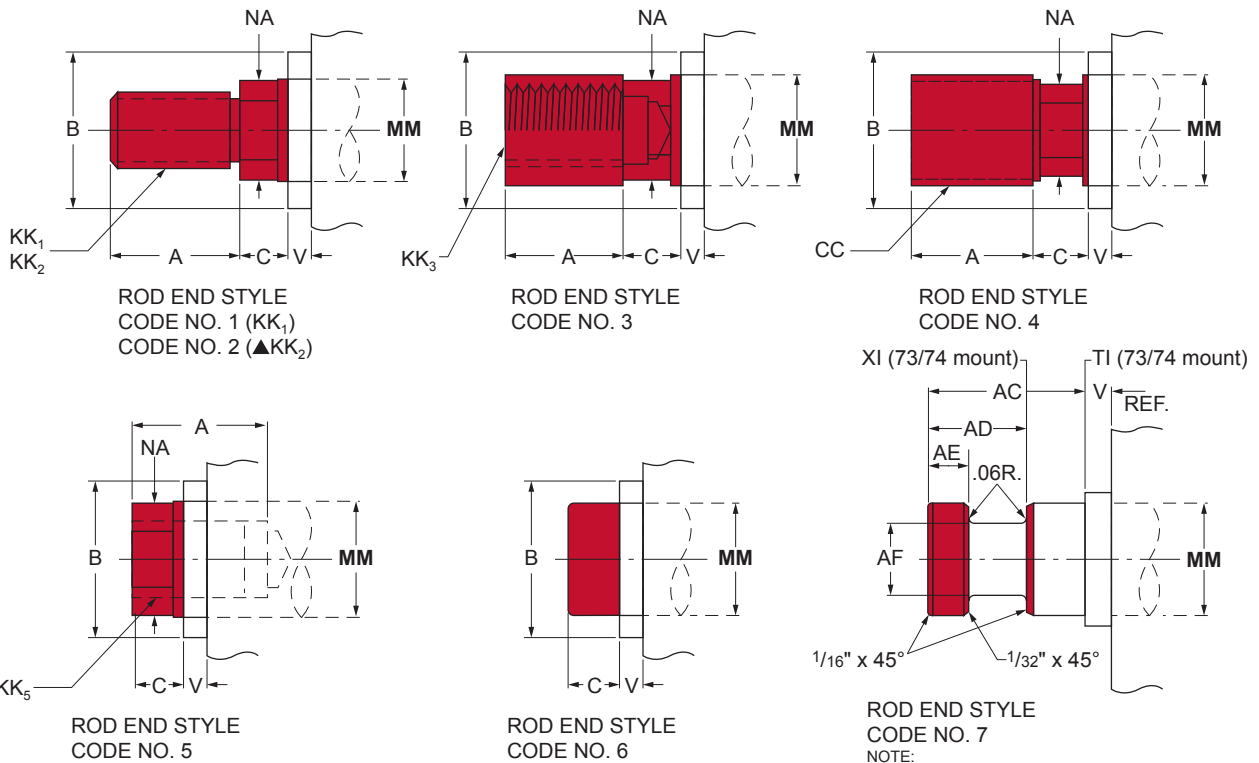

NOTE:
 1.) AC = 1 5/8" FOR 1 1/2" BORE CYL.
 2.) AC = 3 3/4" FOR 7" BORE CYL.

CAUTION: When ordering replacement cylinders for competitive brands, our Style #1 rod ends may not be interchangeable with other manufacturers' Style #1. Our Style #2 should be used if this applies to your application.